

2023 Rule Book



[Table of Contents](#)

2023 Outboard Drag Boat Association Officers	4
President:	4
Vice Presidents:	4
Secretary	4
Treasurer	4
Motor Tech	4
2023 Board of Directors & Rules Committee	4
ARTICLE I: Title	5
ARTICLE II: Purpose	5
ARTICLE III: Membership	5
ARTICLE IV: Dues	5
ARTICLE V: Board of Directors	5
ARTICLE VI: Officers	6
ARTICLE VII: Meetings of Membership and Board	6
ARTICLE VIII: Loss of Membership	6
ARTICLE IX: Committees	7
ARTICLE X: Alteration or Amendment of Bylaws	7
ARTICLE XI: Liabilities	7
Article XII: Confidentiality	7
Article XIII: Forum Selection Clause	7
Article XIV: The “Race Day Application”	7
2023 ODBA RULES	8
General	8
Safety	9
Registration & Points	9
Competition Procedure.....	11
Fuel/Technical	12
Protests/Infractions	13
ODBA Starting Line Procedures	16
Class Rules	17
Lake Racer	17
Super Mod	20
Super Stock	
Specific Motor Rules and Minimum Weights	20
<i>Mercury</i>	20
<i>OMC</i>	21
<i>Yamaha</i>	21
1430 Mod	24
Specific Motor Rules and Minimum Weights	24
<i>Mercury</i>	24
<i>OMC</i>	25
<i>Yamaha</i>	25
<i>Suzuki</i>	25
Pro Stock	27
Specific Motor Rules and Minimum Weights	29
V6 pro	30

River Racer 30
Pro Mod 30
Pro Drag 30
Big Block PRO Mod30
Unlimited 30
Definitions 30
2023 ODBA Race Site Requirements 31
 Items provided by ODBA 31
 Event Sponsor Provided Items: 31

2023 Outboard Drag Boat Association Officers

President:

Shane Stovall (334) 358-3533

Vice Presidents:

Randy Harrell (229) 224-4999

Secretary:

Crystal Bailey (334) 358-3533

Treasurer:

Jenni Stovall

Safety

Mike Clemmons (706) 564-6372

Fuel Tech:

Motor Tech:

Mike Clemmons (706) 564-6372

2023 Board of Directors & Rules Committee

Board of Directors

- Shane Stovall (334) 358-3533
- Jack Barsh (904) 813-3195
- Randy Harrell (229) 224-4999
- Mike Clemmons (706) 564-6372
- Jimmy Melton (850) 554-9472
- Duane Diamond (850) 336-3122
- Keith Hancock (706) 816-9323
- Kelly Patrick (706) 864-4976
- Kevin Turberville (251) 593-1150

ARTICLE I: Title

1. The name of this organization shall be Outboard Drag Boat Association, hereinafter referred to as ODBA.
2. The location of the principal ODBA office shall be in the state of the office of the ODBA's legal counsel. Meetings of the Board of Directors shall be announced in writing, by conference call, email, via internet, or in person.
3. ODBA is a nonprofit organization and all business shall be conducted as a nonprofit organization.

ARTICLE II: Purpose

The purposes for which ODBA is organized are as follows:

1. To stimulate interest in owning, racing or watching outboard drag boats.
2. To encourage family participation in all phases of outboard drag boats.
3. To promote cooperation among clubs thereby broadening viewer awareness in the sport of outboard drag boat racing.

ARTICLE III: Membership

The membership of ODBA shall be composed of the following types and voting privileges:

1. **FULL COMPETITION MEMBERSHIP:** The participating driver of the registered race boat must be a full competition member. If the **DRIVER IS NOT** the **OWNER** of the race boat then the **OWNER MUST** be a full competition member also. Each full competition member in good standing shall be entitled to **ONE** vote per membership to be cast concerning elected officers and general rules at the yearly general meeting. Each competition membership is valid for the current year for **\$250**.
2. Any driver wishing to participate in competition with ODBA must be 19 years of age or older.
3. All applications for membership must be complete and are subject to approval by the majority of the Board of Directors before acceptance into ODBA.

ARTICLE IV: Dues

1. Fiscal year is January 1 through December 31 of the current year. All annual dues for the current year shall be due prior to the conclusion of the final race of the year or October 31 whichever comes first to be eligible for voting rights for that year.
2. The amount of annual dues shall be decided and voted on by the Board of Directors. Any changes in dues shall become effective only upon vote of the majority of a quorum member of the Board of Directors.
3. No proxy voting allowed.
4. See page 10 - 2023 ODBA Rules, Registration and Points, for dues and entry fees.

ARTICLE V: Board of Directors

1. The property and business of ODBA shall be managed and controlled by the Board of Directors.
2. Only Competition or Associate members shall be eligible to serve on the Board of Directors.
3. The Board will consist of a maximum of **TEN** members, appointed by the existing Board of directors for a minimum of two years. The Board of Directors will be approved by the General Membership at the Annual Meeting. The President *will be a member* of the Board of Directors. The Board of Directors shall elect a Chairman of the Board to preside over the Board of Directors meetings
4. Any Board Member who fails to perform the duties of his/her office in a satisfactory manner or whose actions are deemed unethical or below the high standards set by ODBA may be recommended for replacement by the Board of Directors. The President is to vote only in the event of a tie.
5. If any Board Member misses **three** consecutive meetings, he/she may be asked to resign. The new Board Member will be appointed by the President with Board approval to fulfill the remainder of the existing term.

ARTICLE VI: Officers

1. The Officers shall be as follows: President, Vice President(s), Secretary, and Treasurer.
2. A. The President shall be elected at the Annual Meeting. The Vice President(s), Secretary, and Treasurer, and Motor Tech shall be appointed by the incoming President, subject to approval by the General Membership at the Annual Meeting. Terms for all officers shall last approximately two (2) full race seasons beginning at the Board of Directors Meeting to be held at a date and time of the president's discretion (per 2023). B. Any candidate running for president must have served a minimum of two (2) years on the ODBA Board of Directors.
3. The President shall be the Chief Executive Officer of ODBA and shall preside at all meetings of the general membership, unless designated by the President to another officer. Further, the Board of Directors shall be responsible for the general management of ODBA and the President shall see that all decisions of the Board of Directors are carried out. The President shall execute all contracts and agreements authorized by the Board and shall have the general powers and duties of supervision and management usually vested in the office of President of an organization which include volunteer assignments covering each race sit (i.e.scales, pit area and ramp duty).
4. The Vice President shall be vested with all the powers, shall perform the duties of President in his/her absence, and shall perform any others duties as from time to time may be assigned him by the President or by the Board of Directors.
5. The Treasurer shall perform the duties normally performed by the Treasurer of any organization, shall keep accurate records of receipts and disbursements. The Treasurer shall male all deposits of money and other valuable effects in the name of ODBA in such a depository as may be designated by the board or selected by the Treasurer approved by the board. The treasurer shall disburse the funds of ODBA as ordered by the Board of Directors and shall submit to the board and the President, receipts or vouchers for said disbursements. The Treasurer shall give an accurate account of all transactions and render a statement of the financial condition of ODBA at the annual meeting of the General Membership.
6. It is the duty of each principal officer to provide a replacement in his/her absence at a scheduled race and to inform the President of Board of Director Member of said replacement by an alternate officer prior to that race.
7. Any office vacancy may be filled for the unexpired portion of the term by a successor chosen by the President and approved by The Board of Directors, except the office of President that shall be filled by a Vice President.
8. Any officer who fails to perform the duties of his/her office in a satisfactory manner or whose actions are deemed unethical or below the high standards set by ODBA may be recommended for replacement by the President and voted on by a majority vote from the Board of Directors.

ARTICLE VII: Meetings of Membership and Board

1. There shall be an annual meeting of the general membership at a time and place selected by the current President and approved by the Board of Directors. The Secretary shall inform the general membership of all open meetings, excluding those of the Board of Directors.
2. There shall be meetings of the Board of Directors, as needed, during racing season. The annual Banquet shall be considered as the annual meeting of the Board of Directors.
3. The President, by request of the Board of Directors, may call special meetings of the general membership.
4. At least five members of the Board of Directors must be present, or in conference, to constitute a meeting.

ARTICLE VIII: Loss of Membership

Membership may be lost because of the following reasons.

1. Voluntary withdrawal or resignation submitted in writing to the Secretary of ODBA.
2. Failure to abide by ODBA rules, which are available to all members via online and/or a hard copy.
3. For cause(s) as determined by and upon official action of the Board of Directors of ODBA, if said cause(s) would bring discredit to ODBA.
4. Any other valid reason or cause at ODBA discretion.
5. No refunds after participating in any race or for cause.

ARTICLE IX: Committees

1. The ODBA shall have such standing and other committees as may be adopted or prescribed by the President or by the Board of Directors. Such Committees shall have the powers, duties and obligations as prescribed by the President or the Board of Directors. The President is empowered to appoint chairpersons of such committees when necessary.

ARTICLE X: Alteration or Amendment of Bylaws

The Board of Directors, by a majority vote of the Board present at any meeting, may suggest new bylaws or amendments to current bylaws, and such new or amended bylaws so suggested may be added, changed or amended by majority vote of the Board of Directors present at any special or regular Board of Directors' forum.

ARTICLE XI: Liabilities

The ODBA and its Officers and Board Members shall not be held liable for the manner in which their private organization is operated. Any attorney's fees incurred out of a dispute shall be paid by the party bringing the dispute.

Article XII: Confidentiality

All pertinent sensitive information discussed in any meeting is strictly confidential as are decisions decided on by the Board of Directors and/or any committee member. Except to the extent necessary to allow the operation of this private organization. Violation of such could result in a loss of membership.

Article XIII: Forum Selection Clause

Venue for any legal action which may be brought against ODBA or its officers and/or board members shall be deemed to lie in Autauga County, Alabama. The ODBA shall be governed by the laws of the state of Alabama.

Article XIV: The "Race Day Application"

The "Race Day Application", in conjunction with these by-laws shall supersede any other written document or oral representations as related to any ambiguities related to the operation of this private

2023 ODBA RULES

NOTE: *It shall be the boat driver and boat owner's responsibility to adhere to ALL the following rules.*

General

ALL RACE BOATS MUST MAINTAIN THEIR MINIMUM REQUIRED WEIGHT PLUS FUEL DURING THE ENTIRE RACE!

1. ODBA races outboard powered boats only.
2. No drugs allowed. **No drinking of alcohol by Drivers or Crew Members before and/or during completion of all sanctioned events and inspections for that day.** Race driver/owner will be responsible for their crew. Violations will disqualify driver/owner for that day. (Crewmembers are anyone involved with race boat preparation on race day.)
3. ODBA CODE OF CONDUCT: ODBA expects its members to conduct themselves in a professional manner at all times during the course of a race weekend. This includes, but is not limited to, personal or team conduct at locations such as the race site, hotels, restaurants, or other local facilities. No driver/owner or team will be allowed to participate in any ODBA sponsored event while displaying any lewd, abusive, vulgar or obscene language and/or image,

etc. Issues resulting from such activity can be considered a Minor/Major infraction and will be dealt with as noted in Section G #13.

4. **The drag race course will be (800') or changed to 660 as needed for all Classes.**
5. **The ODBA reserves the right to shorten or change course length as necessary for safety purposes.**
6. Boats may be required to have a competition number applied to a vertical surface of the boat visible and legible at all times during competition. Numbers are to be applied for and will be approved on a first-come, first-serve basis. Approved numbers shall be protected for the current season and one additional year. Boat number should be 8" tall and 2" wide on a contrasting color.
7. **All decisions made by the President, starting line judge, the finish line judge and/or the Rules Committee/Board of Dir. is final.**
8. **There will be no congregation of persons around the judge's stand (start or finish line), weight scales, motor tech, or fuel tech without the judge's permission. Any exceptions must be approved by ODBA.**
9. Approximate Race Times (unless noted in race flyer, Website or at Drivers' Meeting) **Race Registration 8:00 a.m. to 9:30 a.m.**
 - **Late Registration (w/ \$50.00 fine): 9:30 a.m. to 10:00 a.m. Registration closed after 10:00 a.m. -**
 - **Drivers' Meeting 10:30 a.m. approximately 20 minutes**
 - **Race Starts 12:00 NOON Saturday & 12:00 NOON. Sunday, if permitted. RAMP CALL IS AT 11:30 AM each race day unless announced differently.**
10. **ODBA reserves the rights to require certain available sponsor decals and logos be displayed on boats during competition.**
11. ODBA and its race teams reserve the rights to sell and distribute ODBA and team merchandise at all ODBA events and websites.
12. Any exhibition runs must have prior approval of ODBA's Board of Directors. All exhibition runs are subject to ODBA safety protocols and will be allowed only as time and weather conditions permit. Exhibition Boat Owner/Driver must sign ODBA's standard liability release forms. These forms will be available from our ODBA Secretary at the judge's stand. These forms must be completed before these boats or teams are allowed on the racecourse.
13. **The ODBA Rules Committee reserves the right to change technical specifications or weight requirements in any class to ensure parity and quality of competition between various boat/motor combinations.**
14. All officials, Board of Directors and Work Detail should be at Race Site by 7:00 a.m. on Saturday and Sunday.
15. The first class that runs on Saturday will be the first class that can be at the scales that morning; the second class that runs should be the second class that can be at the scales, etc.... Sunday boats will be permitted at the scales on Saturday only after all Saturday classes have completed their pre-race weigh-in.
16. The first class for each day may be asked to be lined up and ready at the boat ramp before the driver's meeting begins at 10:30 a.m. As soon as that class has entered the water, the next class should begin lining up at the ramp. That should not even require a Ramp Call! For any given class, if you are not in line at the ramp when the first boat enters the water, you may not race and may lose your entry fee.
17. Anyone involved with a race team as a crewmember or with ODBA as a volunteer must sign a general liability release available at the judge's stand with the Secretary.
18. All teams are required to have matching shirts/uniforms, teams that are not compliant will not receive any purse money.
19. At any event a racers crewchief or crew gets out of line at the judges stand while a racer is in the water racing, the racer is subject to be disqualified for their actions.
20. After a class has started and numbers are drawn no radio communication will be allowed to a driver from the bank at the any time at the starting end of the track, any communication will be from the finish line and at that time the crew chief can only talk to a driver after he or she has made their pass.

Safety

1. There will be a visual boat safety inspection by designated safety inspectors before any class races. The Tech Sheet issued at registration must be initialed by inspector(s) named at the driver's meeting. Each participant is responsible for meeting all his or her safety requirements, no exceptions.
2. Propellers installed on motors must have a propeller cover and remained covered while in pits and on the way to ramp (NO TOWELS). Installed propellers must be covered immediately after weight check or after leaving the water if weight check is not necessary. Drivers/owners who violate this rule are subject to a \$50.00 fine to the ODBA General Fund AND THIS FINE MUST BE PAID PRIOR TO RACING.
3. No cranking/starting of engines with propellers installed, while boat is out of the water, at the race site. Drivers/owners who violate this rule will be fined \$100.00 to the ODBA General Fund.
4. Kill switches are mandatory in all classes. The kill switch is to stop power to both engine and electric fuel pump(s). Boats with a restraint system will require a roll over type kill switch.
5. Foot throttles and trim buttons on wheel or floor are required in all race boats.
6. All race boats must have dual mechanical steering or hydraulic.
7. All boats with weight added must have weight secured, bolted or cabled in place, rubber straps are not acceptable. Safety Tech will determine if weight is properly secured.
8. Racers in all classes must have approved racing helmets and certified racing lifejackets (examples: Lifeline, Security or a jacket equal to). **Recertification for the jackets will be every 3 years or in the event of a driver having to use their safety gear for its intended use then recertification will be needed before racing next race.** All drivers must wear required driving apparel while on the racecourse. This includes, but is not limited to, suitable protective footwear (appropriate closed toe footwear and no cut-off shorts). A full driving suit is recommended, but not required. ODBA encourages all drivers and crewmembers to wear appropriate race site apparel while in the pit area. This includes, but is not limited to, driver and crew uniforms, appropriate footwear, eye protection, and basic protection from the sun and heat. Helmet restraints are recommended. Not only is this addendum to provide protection from elements of concern associated with this or any form of motor sports, it is intended to promote a better overall appearance of ODBA's race day program.
9. Proper approved driver restraint systems are required for all capsule race boats. Boats with restraints are required to have adequate secured floatation. (No Noodles)
10. All safety gear must remain on while motor is running and in gear. First offense is a fine of \$100, second offense DURING THE SAME RACE is a disqualification.
11. All boats must enter the water with engine cowling on motor, secured in place.
12. All boats must have a fire extinguisher with gauge and they must be mounted and accessible to driver from the driver's seat. Extinguisher must be fully charged. All pits should have a readily available fire extinguisher.
13. Drivers are to remain in the cockpit area of a boat at all times after leaving the ramp and during the race. No one is allowed to leave the cockpit area and move about the boat without being at the start boat or return boat. If returning to the starting barge is not possible then radio for another racer preferably an officer or board member to watch what you do while you are out of your seat. An official or another racer must observe all actions. Failure to abide by this rule is subject to a disqualification for that race day. NO WARNINGS.
14. It will be at the discretion of the ODBA's Board of Directors to cancel a race due to weather conditions.
15. **RADIO COMMUNICATION TO SHORE WILL BE REQUIRED FOR ALL RACERS, ALL CLASSES. FAILURE TO DO SO WILL RESULT IN A \$100 FINE FOR FIRST OFFENSE AND DISQUALIFICATION FOR SECOND OFFENSE.**

Registration & Points

1. All drivers AND boat owners (if not the same person) participating in ODBA sanctioned races shall possess an annual competition membership and be in good standing with ODBA. 2020 membership fees are as follows:
 - FULL Competition Membership \$200.00

2. Entry Fee will be \$130.00 + \$70.00(Insurance/Rescue fee) per class, paid on Saturday for weekend competition. Entry fee payback shall then be split 80% to the respective class purse, 20% to the respective class High Points Fund for all classes.
3. NO LATE Registration will be allowed following the roll call at the Drivers Meeting. No refunds will be made after this roll call.
4. Roll call will be taken at the start of both the Saturday and Sunday Drivers Meeting. If the boat driver is not present (doesn't answer roll call) at Drivers Meeting he/she will not be allowed to race that day unless driver pays a \$50.00 fine to ODBA General Fund prior to start of the first race of the first class that day. Driver is also required to have already registered to race that day AND to know what was covered in Drivers Meeting in order to race.
5. **ODBA's intended weekend racing schedule will be a standard TWO-DAY format. All classes will run Saturday and Sunday. A two-day point system will be in affect and tabulated to determine the winner for the weekend.**

Points will be awarded as follows:

	Place Saturday	Sunday
1st	100	110
2nd	90	99
3rd	80	88
4th	70	77
5th	60	66
5 th	50	55
6 th	40	44
8 th	30	33
9 th	20	22
10 th	10	11

The points each boat accrues for the two days are added together for total weekend points. The boat with the most points will be awarded first place, and so on. If a boat enters a class on Sunday, Saturdays points must be refigured based on TOTAL number of entries for the class.

**What if on Saturday the boats that would have finished third and fourth break at the same time add together the points for both places and split evenly between both places.

For example, (four boat class):

	Weekend Saturday	Weekend Sunday	ODBA Total Points	Final Place	High Points John
DQ	0pts	3rd—88 pts	88 pts	4th	7pts
Paul	1st—100 pts	2nd—99 pts	199 pts	1st	10 pts
Harry	2nd—90 pts	4th—77 pts	167pts	3rd	8 pts
Ringo	3rd—80 pts	1st—110 pts	190 pts	2nd	9 pts

6. Based on the weekend finishing order for the race held that weekend, 1st place receives 10 points; 2nd--9 points; 3rd--8 points; 4th--7 points; 5th--6 points; 6th--5 points; 7th--4 points; 8th--3 points; 9th--2 points; 10th place and below, each receives 1 point.
7. Disqualification (minor infraction) of a boat will result in no points being awarded toward weekend total for the day of DQ.
8. Before any prize monies will be awarded, each driver must turn in a completed Tech Sheet signed off by all applicable officials. (I.E. Safety, Fuel, Motor Tech, Weigh Master) to the Secretary, Asst. Secretary, Treasurer or Asst. Treasurer at the judges stand.
9. **Class payouts will be as follows: 10 Boats or more- 1st place 65% 2nd place 25% 3rd place 10% 9 Boats or less 1st place 70% 2nd place 30%**
10. **There must be at least three (3) boats to be included in sponsor provided prize money.** At least two (2) boats are needed to make a class. In the case of a two-boat field, the drivers must pay standard entry/rescue/insurance fee and will race for a 70/30 split of their remaining entry. Weekend prize money and High Points will be awarded according to Rules in this section. In the event of only one boat showing for a particular class (and there is no other classes for that boat to participate in) two (2) show up points will be awarded.
11. **All prize money minus necessary expenses will be paid out on a per boat basis per class.**

12. ODBA awards High Points for each Competition Member participating in a race. All High Points will be awarded to the Boat as stated on membership form and/or weekend liability release form. The boat owner and driver must be a current Competition member with ODBA to acquire High Points. **Final World Championship race will not be included in High Point totals.**
13. **2023 ODBA Points Race Outline. Go to page 26 for this year's points race details.**
14. A Driver can be substituted twice per year per class and Substituted Member must be a Full Competition Member and approved at registration. With the points staying with the boat that is being substituted for.
15. If a racer's entry fee is paid and he is present at the drivers meeting, but he chooses not to race Saturday and or Sunday, they are allowed to receive one ODBA High Point. But if he races one of the two days he then will receive last place points.
16. If a racer is DQ'd (minor infraction) on one race day, but is allowed to race (but does not have to) on the other race day, he will receive ODBA High Points according to the total of Weekend Points. In the event of a one day race any disqualification will result in no "legal" racing days for the event thus no High Points can be awarded.
17. If a scheduled race is cancelled due to weather or unforeseen conditions those racers who have registered will receive "show up" points two (2) points added to their ODBA High Points total. Racers not at race site, ready to race when race is cancelled will not receive High Points.

Competition Procedure

1. No test runs shall be allowed after ODBA assumes control of the race site. **ODBA reserves the right to require "hot laps" prior to the beginning of each class.**
2. ODBAs "Class Call" protocols will be as follows:
 - a) The first class that runs on Saturday will be the first class that can be at the scales that morning: the second class that runs should be the second class that can be at the scales, etc. Sunday boats will be permitted at the scales on Saturday only after all Saturday classes have completed their pre-race weigh-in.
 - b) The first class for each day will be lined up and ready at the boat ramp BEFORE the driver's meeting begins at 10:30 a.m. As soon as that class has entered the water, the next class should begin lining up at the ramp. That should not even require a Ramp Call!
 - c) For any given class, if you are not in line at the ramp when the first boat enters the water, you may not race and may lose your entry fee.
 - d) It is the driver's responsibility to maintain timely awareness of his or her class racing schedule and report to the boat ramp when called for class competition
2. At no time after the first pair of boats approach the start line, can a driver in that class receive any help from the bank and/or another boat. Nothing can be added or removed from the boat.
3. Refueling will be allowed in any class during competition BUT ONLY after ten (10) passes have been made BY THAT DRIVER (maximum of 2 gallons at the discretion of the PRESIDENT).
4. Flags and their meaning:
 - Black Flag: The racecourse is closed. Anyone in the water should proceed safely to his or her trailer. The racecourse will be black flagged upon mishap such as an accident on the course, etc.
 - Colored Flag: Yellow flag indicates return to start barge.
 - Other Flags will be covered on race day at the Drivers Meeting, if their use is deemed necessary.
5. Race heats are official after starting flag is waved, dropped or raised OR when green lights have been turned on by starter. (A GREEN START RACE MAY BE RERUN AT THE DISCRETION OF THE STARTER AND/OR THE FINISHLINE JUDGE). Any desire to request a more even start must be indicated by a driver raising both hands into the air or turning out of the staging lane PRIOR to reaching the white start buoy.
6. False Starts - the Starting Official determines a false start. The Starting Official (whose decisions are FINAL) will notify the "offending" driver of his /her infraction. The Starting Official may have both boats turn around and come back to the start line without charging either boat with a false start. False starts are charged to a driver per class. Upon the second false start per class charged to a driver by the official starter is a loss. The third false start charged to a driver in a class results in a second loss.
7. In the event of a dead heat (race winner cannot be determined) racers will remain in the same lanes and rerun same race heat.

8. During a race heat, boats must not cross the finish line on the “wrong” side of the centerline buoy. Boat “A” must not enter boat “B’s” lane, or vice versa or go outside any marked lanes doing so will result in a loss for that heat.
9. Finish line video equipment will be used to help Finish Line Judge determine the winner of each race heat. This equipment will be used as weather and conditions permit. There will be no public viewing of the finish line video tape; racers will not ask Finish Line Judge to “prove” his decision. Racers, crewmembers and family members are prohibited from congregating at or near Finish Line Video Station. The Finish Line Official’s rulings are final with no exceptions.
10. If a boat fails to approach the start line under its own engine power and take the green flag/light when his/her draw number is held up, that boat is considered broken and given a loss. In the event neither boat can approach the start line under its own power and take the green flag/light, both boats are considered broken and both are given a loss, once upon receipt of the second loss that boat or both boats are out of competition for that class. ON ANY LEGAL SINGLE BYE RUN THE DRIVER MUST TAKE THE GREEN LIGHT AND MAKE A FULL PASS. (THIS DOES NOT HAVE TO BE A FULL THROTTLE PASS, IF FULL PASS IS NOT PERFORMED WILL RESULT IN DOUBLE LOSS).
11. In the event that a competition class is halted for accident recovery, inclement weather conditions, darkness or other forces beyond ODBA’s control, the class will be restarted, from the existing brackets, at the point where competition was stopped.
12. Drivers failing to report to the ramp RACE READY by FINAL CALL will be disqualified for that class, that day. “Final call” will be determined by ODBA official and announced. (See Page 15 #2).
13. If a boat needs to be towed from the course in the name of safety, the driver is NOT OUT OF COMPETITION unless he has two losses.
14. A boat that TAKES A ROPE OR RECEIVES HELP FROM THE BANK OR ANOTHER BOAT OR is towed to the ramp is OUT OF COMPETITION at that point. (IF YOU RECEIVE ANY ASSISTANCE OR HELP).

Fuel/Technical


1. All drivers will be issued a Tech Sheet for each class entered. It is the driver’s responsibility to have their Tech Sheet completed by appropriate persons as described in Drivers Meeting. Failure to do so could result in disqualification from that class for that weekend. You must turn in your Tech Sheet to get prize monies.
2. All gasoline and oil used in competition must be purchased at THAT race site during that weekend in specified quantities from the designated supplier. Tech Sheets must be completed accordingly. This rule applies to all gas classes: Pro Drag, and Unlimited are exempt.
3. Items not allowed in any boats in competition unless expressly noted in class rules: □
Variable pitch propellers
4. The following items are only allowed in the Unlimited Class unless specifically allowed by individual class rules:
 - Multi Engines
 - Turbochargers
 - Superchargers
 - Transmissions with more than one forward speed
 - Cool Cans (Only allowed in non fuel tech classes)
 - Expansion Chambers
 - Speedmaster Type Gear cases
 - Non-production based outboard blocks must be based on production outboard block.
 - No billet motors
 - No X Front Halves
5. The following are not allowed except in 1430 modified, V6 Pro, River Racer, Pro Mod, Pro Drag Pro Carb and Unlimited unless expressly note in the class rules:
 - ECU box must be mounted on engine. This is to be the one and only ECU box. Carrying an additional ECU in boat is not allowed.
 - No unapproved devices, extra wiring or hoses allowed under the engine cowl beyond that of the normal engine and gauge wiring and associated hoses.

- Non Shiftable Gearcases
 - Any and all fuel pumps must be activated by single switch. Regulator must be mounted in back of boat or on engine outside of the reach of the driver. Fuel pressure may not be changed or adjusted or manipulated during the race. Fuel pressure may not be changed or manipulated from the start of competition of its class until the boat clears tech. Fuel return line must be contained in back of boat outside the reach of the driver. Devices to restrict or manipulate the flow of the return line are not allowed.
 - Mechanical or electrical devices to alter total timing, timing curve, fuel curve or over all fuel mixture other than original ECU adjustment pot are not allowed. No OEM detonation modules or timing boxes allowed. No device at all in the boat that can alter ignition timing or fuel mixture from the time competition begins until the boat clears tech. □ The engine may have only one fuel supply line and one fuel return line.
 - Any parts that are not immediately available for purchase to all odba racers are only allowed to be ran in UNLIMITED, PRO DRAG AND BIG BLOCK.
6. The top five (5) finishing boats must weigh unless another number is specified at the Drivers Meeting. All drivers must remain in their boat until weighed unless otherwise instructed by Weigh Master and Fuel Tech. No persons other than boat driver will be allowed on the trailer or in the boat until all inspections are complete. Failure to comply can result in disqualification from that class for that day. Weigh Master must complete tech Sheet. Any boat receiving a DNF must report to the Scales.
 7. The top five (5) boats or number specified at Drivers Meeting, in a spec gas class must submit to and pass a fuel check. Fuel Master must complete tech Sheets in order to receive prize money.
 8. ODBA reserves the right during motor tech inspection to seize any controversial part(s) or component(s) until origin, class legality or authenticity of part/component is confirmed. Any prize money and ODBA points will be withheld until a decision regarding part/component is made. ODBA will accept cost of shipping and insurance when sending part/component to an authority (i.e., Mercury, OMC, Yamaha, etc.) for confirmation and authenticity. ODBA cannot be held responsible for loss or damage of part/component during shipping.
 9. Any boat in any class may be subject to a motor tech inspection (and fuel check, if applicable) and/or boat inspection by ODBAs Technical Inspector at any time after race registration. Failure to comply could result in a gross infraction. (See Page 17, #4.)
 10. During a tear-down motor/boat inspection, only the owner/driver and Technical Inspector and personnel designated by Technical Inspector will be allowed in the inspection area. Two (2) persons per boat only.
 11. Spec fuel and oil may not be modified in anyway. Although the racer may use any fuel oil ratio he chooses. The use of additives or any other process which alters the properties of the spec fuel oil mixture is prohibited.
 12. No dumping: No oils, fuels, lubricants, or chemicals are to be “dumped” at any of our race sites. It is the responsibility of each ODBA member to dispose of these items in accordance to local, state, federal and OSHA regulations.
 13. All drivers are responsible for their entry being recognized by the radar as they approach starting line.

Protests/Infractions

1. Official protests must be written and filed prior to, or within 1 hour, after the final heat for that class. Protest forms may be obtained from the Secretary or Asst. Secretary at Judges Stand. Completed protest forms and any fees are to be turned over to the Secretary, Asst. Secretary, Treasurer or Asst. Treasurer. Only a written protest signed by the boat owner and/or driver will be accepted. The boat inspection protest fee is \$300.00. The engine inspection fee is \$1000. This fee is to be paid in cash when protest is filed.
2. After inspection:
 - If boat/motor is found to be legal, protest fee is paid to owner/driver being protested
 - If boat/motor is found to be illegal, protest fee is returned to person/persons filing protest. Other actions by ODBA will result.
3. Gas Protest Fee is \$375 (nonrefundable). Fee must be paid in cash at time protest is filed. ODBA performed fuel tests only.
4. ODBA rule infractions will not be tolerated. ODBA has three separate and distinct levels of infractions, each carrying its own distinct level of punishment.

5. Minor Infraction: an infraction deemed by ODBA's Board of Directors to be unintentional. A minor infraction may result in loss of points and event. Examples include, but are not limited to:
 - Not wearing proper safety gear (i.e., life jacket, helmet, etc.).
 - Removal of safety gear while on plane.
 - Not showing up at scales.
 - 15 pounds or less under specified class weight.
 - Not putting the boat into the water when instructed.
6. Failing fuel test.
7. Derogatory or destructive comments made post race can be construed as a Minor/Major infraction.
8. If a Racer is assigned to a work detail and does not show up for said detail he or she will be fined \$200.00 for 1st offense, \$250.00 for 2nd offense. Fine must be paid before he or she will be allowed to join race competition.
9. Major Infraction: an infraction deemed by ODBA's Board of Directors, may upon review of the ODBA Board of Directors, result in a one calendar year suspension of membership and/or the boat from date of infraction. In the event of more than one Major Infraction, the penalties shall run consecutively. Examples of a major infraction include, but are not limited to:
 - 16 or more pounds under specified class weight.
 - Refusal to weigh.
 - Refusal to submit to fuel test.
 - Not passing fuel test.
 - Refusal of motor or boat inspection.
 - Not passing motor or boat inspection. □ Two minor infraction disqualifications.
10. Gross Infraction: A most serious infraction deemed by ODBA's Board of Directors to intentionally disrupt or discredit the operations of ODBA. May, upon review of the ODBA Board of Directors, result in lifetime loss of membership by an individual or the group responsible. Examples of a gross infraction include, but are not limited to:
 - Directing any nature of reprehensible conduct toward any race official, including but not limited to, obscene, abusive, or threatening language.
 - Threatening gestures, including, but not limited to, touching any race official or engaging in conduct which reasonably leads any race official to anticipate an offensive touching.
 - Offenses punishable with lifetime penalty need not necessarily occur at a race event or even at an event location or even during the race event season to warrant disqualification for life. They need only occur anytime, anywhere. Then, upon the submission to the Board of Directors of an acknowledged affidavit by the official so aggrieved, the Board of Directors shall implement at least a one year disqualification and may, upon majority vote of a quorum of the Board of Directors assembled by any means, issue the lifetime banishment from any and all ODBA events or functions. (i.e. slanderous public comments)
 - Each owner/driver is responsible for the conduct of his crew and the foregoing penalties shall be imposed upon an owner/driver for violations committed by his crew. Crewmembers participating in the infraction of any owner/driver may result in consecutive disqualifications to the owner/driver.
 - Removal of hand or hands from the wheel or other dangerous moves, while boat is under race conditions, will constitute a loss. The second careless action is a disqualification.

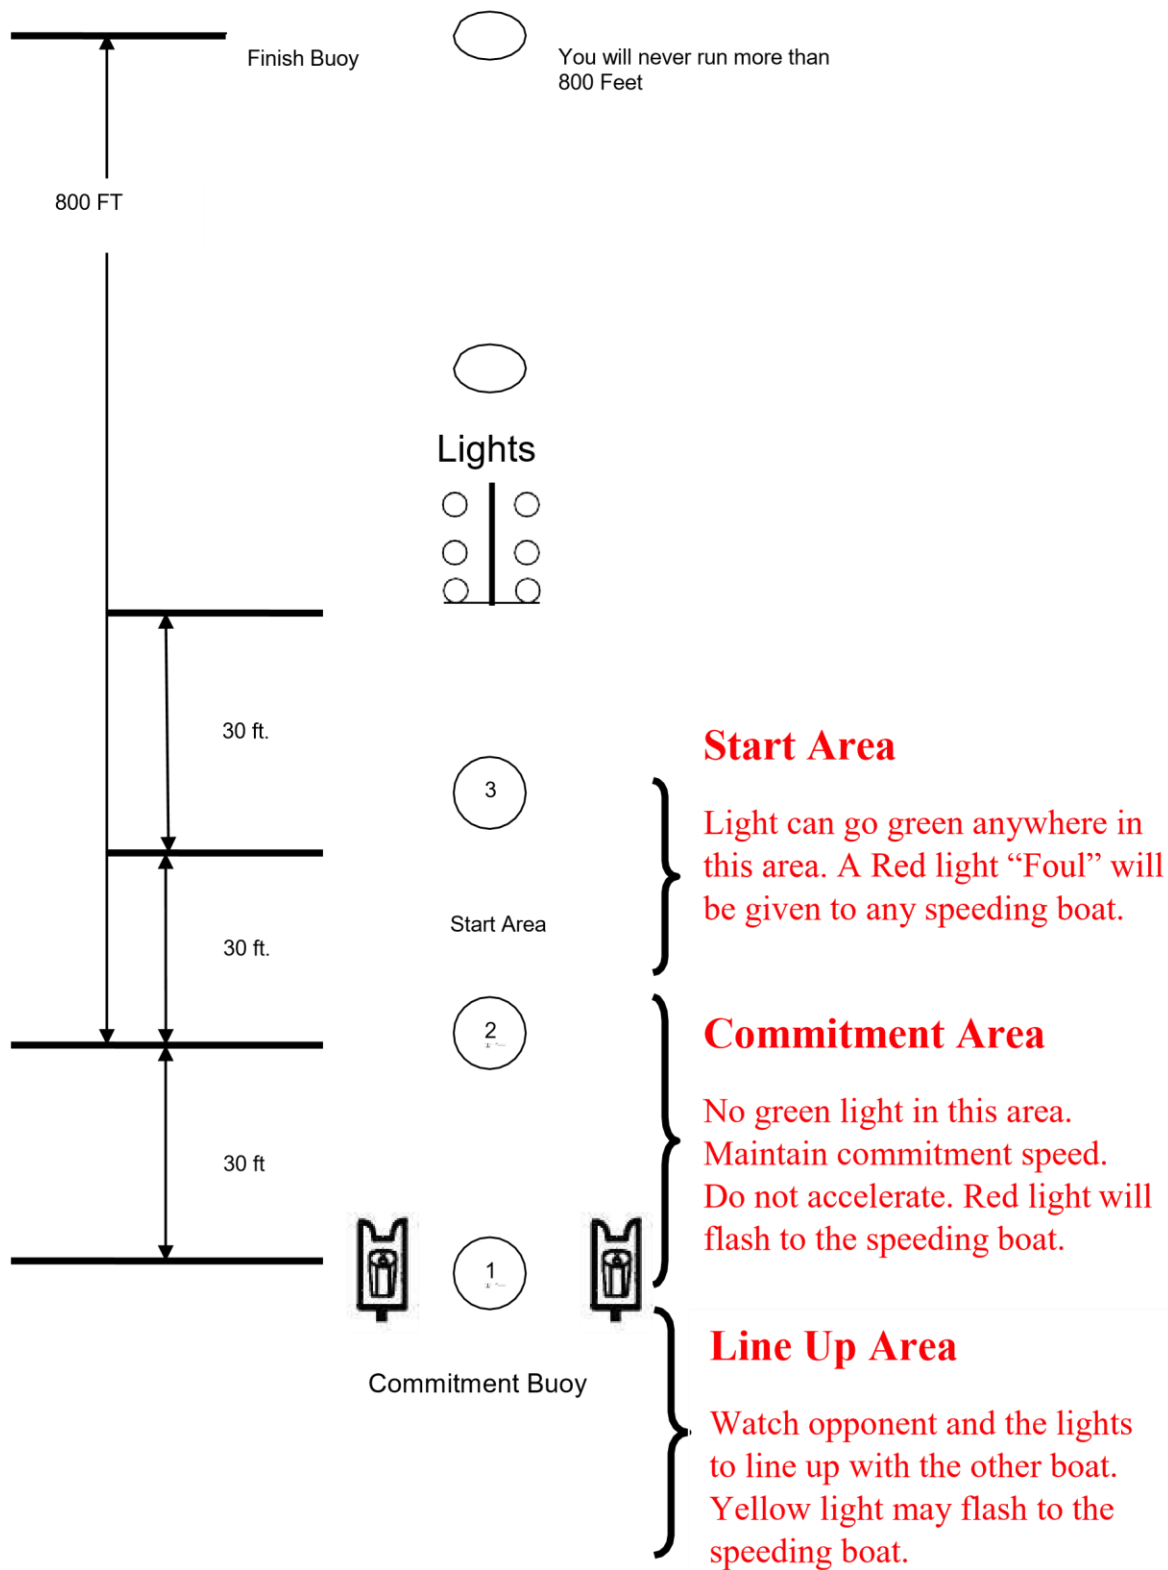

n

ODBA Starting Line Procedures

1. All boats must remain no further than 50-300 yards from the starting barge. Watch the cards for your draw number.
2. Fire up and approach the start line as soon as your draw number is displayed or you will be considered broken and given a loss. (See Competition Procedures, rule #9)
3. The Starting Official sets the pace. There is no “pace boat”.
4. Boats should pair up between the first white (#1 buoy) and the first orange buoy (#2). They should be paired after passing this first orange buoy. The starter will not turn the green lights on

prior to the START BUOY (SECOND WHITE BUOY). If the you feel the pairing is not fair turnout or raise your hands (Do not abuse this!) prior to reaching the START BUOY.

5. Boats must remain paired and not attempt to “slingshot” or pass the other boat. Lagging behind and then speeding up to catch the other boat will be considered a “slingshot”. Attempts to pass or “slingshot” the other boat can result in a false start.
6. A flashing yellow light in your lane signals to SLOW DOWN. Failure to slow down will be considered charging. Charging the line will result in a false start. This applies to both boats.
7. Boats may receive the green light any time after either boat passes the second buoy.
8. If the boats pass the third buoy without receiving a green light, both boats are to reduce to minimum speed and turn around. A red light indicates a false start that has been given to one boat. If there is no red light, there is not a false start.
9. After a lane has been given a false start (red light), both boats will turn around at minimum speed. If your draw number is held up, then you have received a false start. Three false starts by the same boat equal two losses. (Competition Procedures, rule #7)
10. Drivers failing to follow the pre-starting or returning boat instructions will be given a loss.
11. Drivers running past the pre-start buoy, out of set racecourse, or failing to return down the center of the course in single file can be issued a loss.
12. NO TURNING OUT AFTER ENTERING THE COMMITMENT AREA.

Class Rules

Lake Racer

- 1) Any open cockpit, full interior production hull with 3 seats or more configuration
 - a. (Seats can be removed).
- 2) Fuel: 112 octane race gas. Must use spec. fuel and oil purchased at the race site only. No fuel or oil additives allowed. All motors, all spec, No exceptions.
- 3) Engines spec combinations allowed.
 - **Super Stock**
 - 260/280/300 Mercury.
 - ProMax 2.5 Mercury
 - **Pro Stock**
 - Mercury 2.5 200 PS legal Powerhead
 - ACU allowed for Pro Stock combo
 - **Super Gas**
 - 2.4 Mercury, No Drag Motors or Bridge Ports allowed
 - 2.5 Mercury, 200, 225, 260 & 280; No Drag Motors allowed
 - Mercury 3.0 & 3.2
 - Yamaha 2.6 , 3.1 & 3.3
 - OMC 3.0 & 3.3
 - Etec 2.6, 3.3 & 3.4
- 4) **Super Stock** motors must retain all stock hardware and electronics. Rev limiters may be removed from stock ECU's, alternators must be in place and functional.
- 5) **Super Gas** motors does not allow metal removal or addition from block, crank, pistons, connecting rods or front case half. Rotating assembly needs to be Pure Stock unless noted otherwise.
 - Any Clamp Bracket allowed.
 - Aftermarket Midsection allowed 15" min. ➤ Any tuner allowed.
 - Any Bolt on induction systems allowed.
 - Any Flywheel and ignition systems allowed. Outside of Block maybe altered to support ignition.
 - Any cylinder heads allowed.
 - 3.0/3.3 OMC may modify the crank snout or flywheel hub assembly only for Yamaha ignition conversion
 - 2.6 Yamaha may modify crank snout only for ignition upgrade
 - Early model 260's with small bearing cranks are allowed to machine the block to fit big bearing cranks.
- 6) Max of .030" overbore allowed on plated cylinder motors. Add weight penalty of 5 lbs. per cubic inch calculated from standard bore.
- 7) Max of .060" overbore allowed on all cast iron sleeve motors with a weight penalty of 5 lbs. per cubic inch calculated from standard bore.
- 8) Pistons must be forged and or cast aluminum. Ring thickness must be greater than 1.1mm. No Dykes rings are allowed. Keystone or Flat rings only. Motors running under stock 260 or 280 rules must use OEM pistons or aftermarket made to OEM specs.
- 9) NO lightened crankshafts. Metal may be added to balance, but not removed. Stock stroke only.
- 10) Cylinder stiffeners allowed where allowed by engine rules
- 11) NO dual plug heads. Yamaha, OMC, and Suzuki may use aftermarket single plug heads in Mod Prod & Super Gas
- 12) "Behind the Liner" inlet porting allowed per engine spec. Reference specific engine rules for clarification.
- 13) Stuffing allowed on Modified Production motors as per their rules.
- 14) After market composite reeds allowed. OEM reed cages for like motor only.
- 15) No extra wiring, hoses or non-approved devices under the under the engine cowl or in the boat.
- 16) No timing boxes or any device to alter the timing of the engine. No device in the boat that can monitor or alter ignition timing or fuel curve, Mechanical or electronic.
- 17) Multiple fuel pump setups must be wired in series and one switch must start all pumps.
- 18) After market adjustable fuel regulators allowed as per engine rules.

- 19) Over bore carbs & velocity stacks allowed\OEM air box removed. Carb stuffers & slosch tubes allowed.
- 20) Oil injection may be removed.
- 21) Pyrometers, temp sensors, pressure sensors allowed.
- 22) NO aftermarket tuners. OEM tuners may be modified. Any tuner can be used under SUPER GAS RULES unless noted otherwise.
- 23) Gear cases must have F-N-R and shift from the driver's seat.
- 24) After market nosecones allowed.
- 25) NO small gear cases.
- 26) OMC, Yamaha and Suzuki may use aftermarket lightweight flywheels in Mod Prod and Super Gas Spec
- 27) Aftermarket Flywheels allowed. All Engines.
- 28) Minimum midsection length ANY midsection and clamp brackets may be shortened. Aftermarket housing may be used with modified OEM clamp bracket. Liners may be removed and housings drilled for exhaust relief. Aftermarket clamp bracket allowed.
- 29) After market stock appearing lightweight cowls allowed.
- 30) No aftermarket fuel injection or ignition systems allowed. Motec, MAD/SDS
- 31) EFI, MSD, Brucato PCU etc. not allowed. They can only be used under SUPER GAS RULES unless noted otherwise.
- 32) Brucato ACU and Repair (CDI) Replacement Boxes are allowed.
- 33) Billit heads and billit top and bottom caps are allowed.
- 34) BVI Front halves allowed.

Lake Racer Minimum Weights

All weights subject to review at any time

Mercury Outboards

- Rev limiters may be removed.
- 260 EFI motors in this group may use OEM Drag ECU (A-48, A-63, A-6, A-13) and fuel pressure regulator.
- EFI 280 using stock electronics & functional alternator & belt can run this spec.
- 260-1.490" to 1.520" exhaust port height specs.
- 280-1.500" to 1.520" exhaust port height specs. ➤ Required standard head gasket.
 - 260 27-814658-1 0.45 to 0.50
 - 280 O-ring
- If metal has been removed from deck, thick head gaskets must be used.
 - 260 27-822844-1 head gasket part number.
- All components must retain stock factory configuration from the adapter plate up except as noted.
- 2:01, 1:87 gear ration only.
- All components must remain in stock factory configuration from adapter plate and up.

Super Stock

1. No porting, polishing or blending
 - 260 EFI 26cc heads 1550 lbs
 - 260 EFI 37cc heads 1525 lbs
 - 280 EFI stock o-ring heads, stock electronics 1425 (rev limiters may be removed)
 - 280 EFI OEM drag electronics stock o-ring heads 1550
 - 300 drag 37cc heads 1550
 - 300 drag eyebrow with horn 37cc heads 1565 lbs
 - 300 drag eyebrow with SVS 37cc heads 1615 lbs
 - Stock Pro Max 32cc heads 1425 lbs (pro stock setup)
 - Stock 200 32cc heads 1400 lbs (pro stock setup)

Super Gas (no modifying bolt on aftermarket parts allowed)

1. Stock 200 1500 lbs
Stock 225 1525 lbs
Stock 260 1650 lbs
Stock 280 1700 lbs

No 300 Drag Motors

Yamaha Outboards

- **Yamaha 2.6 Liter**
 - Super Gas 1550 lbs. .
- **Yamaha 3.1/3.3 Liter**
 - Super Gas 1750 lbs.

OMC Outboards

- **OMC Stock 3.0/3.3/3.4**
 - OEM 6X1 Carb 1510 lbs.
 - OEM Ficht / Etec injection 1550 lbs.
- **OMC 3.0/3.3/3.4 Super Gas**
 - OMC 3.0/3.3 Super Gas 1750 lbs.
 - OEM 6X1 Carb, Aftermarket Crankcase 1825 lbs.
 - Etec 2.6 (with Etec injection only) 1550 lbs.
 - Etec 3.3 (with Etec injection only) 1700 lbs.
- OMC 3.3 1430 Mod setup with carbs 1615 lbs

SUPER MOD

1. Super Stock 1350 lbs.
2. River Racer 1400 lbs.
3. 1430 Mod 1430 lbs.

Refer to the rules of the class you are running

Super Stock

1. Boats: Any production hull. No true tunnels or hydroplane type hulls.
2. Fuel: Must purchase and use fuel and oil sold at race site only. No additives allowed.
3. See Fuel/Technical rule # 5 applies.
4. No nitrous oxide or any other bottle pressure injection used to enhance engine performance. No nitrous bottles allowed in the boat, disconnected nitrous solenoids.
5. No small gear cases.
6. No aftermarket tuners. OEM tuner and exhaust adapter plate may be modified. No variable tuners allowed.
7. No potentiometers, fuel by pass solenoids or any other devices to alter the fuel curve or pressure allowed. Multi fuel pump setups must be wired so that one switch must start and stops both pumps.
8. No after-market ignition systems or component parts; no spark retard/advances, electronic or mechanical allowed.
9. No metal removal or any internal cylinder block modifications allowed. No porting, polishing, feathering. No piston, rod or crank modifications. No balancing or blueprinting.
10. Pistons may be OEM, Wizard Marine Piston part #10592, Wiseco piston #11061(single ring) or #11062(dual ring). All must utilize unmodified stock weight (OEM weight) wrist pin unless expressly noted.
11. Maximum of three over bored cylinders, of .030" overbore maximum, allowed only on steel bores.
12. Minimum mid-section length is ANY midsection and clamp brackets can be shortened. After-market clamp bracket are allowed. After-market mid-section housing are allowed, must be OEM like. Inner liners can be removed and housings drilled for exhaust relief.
13. Gear cases must have functional forward, neutral and reverse and be shiftable. After market nosecones with low water pickups allowed.
14. Pyrometers allowed.
15. Aftermarket lightweight stock configuration motor cowls allowed all motors. No air induction attached to cowling or engine allowed.
16. After-market composite reeds allowed all motors. OEM reed cages for like motor, no modifications to reed cages allowed.
17. Carbureted motors may remove OEM air boxes and use after-market velocity stacks.
18. Oil injection and mechanical fuel pumps may be removed and blocked off. Carbureted motors may use in the boat electric fuel pump and after-market adjustable fuel pressure regulators.
19. Standard ½" reach spark plugs only. Any heat range, style tip or brand allowed.
20. Aftermarket Flywheels allowed. All engines.
21. Brucato PCU/ACU PPE may be used but adjustments from the cockpit ARE NOT ALLOWED. (e.g. No steam wheels or the like.)
22. Minimum of 10 gallons of fuel purchased at race site.
23. Support rings allowed all motors.
24. Aftermarket adjustable fuel regulator allowed. All engines.
25. Billit heads and billit top and bottom caps are allowed.
26. BVI front halves allowed.

Specific Motor Rules and Minimum Weights

Mercury

25. HP Mercury, 245 HP, 260 HP, 280 HP and 300 HP Drag:
 - Carbureted 245
 - ❖ 1350 lbs minimum weight
 - EFI 260
 - ❖ 1350 lbs minimum weight
 - EFI 280
 - ❖ 1350 lbs minimum weight
 - EFI 300 Drag, center horn
 - ❖ 1350 lbs minimum weight
 - EFI "eyebrow" Drag with horn
 - ❖ 1350 lbs minimum weight

- EFI “eyebrow” Drag with SVS (blue or gold) in stock configuration.
 - ❖ 1365 lbs minimum weight.
 - Rev limiters may be removed.
 - EFI motors in this group may use OEM Drag ECU (A-48, A-63, A-6,A-13) and fuel pressure regulator
 - (1) 260 1.490” to 1.520” exhaust port height specs
 - (2) 280 1.500” to 1.520” exhaust port height specs
 - (3) 300 1.490” to 1.510” exhaust port height specs
 - (4) 300 (eyebrow) 1.460 to 1.475 exhaust port height spec ➤ Required standard head gasket on Drag Engine.
 - (1) 260 27-814658-1 0.45 to 0.50 ➤ (2) 300 Drag 27-822844-1 0.55 to 0.60
 - If during repair, any metal was removed from deck, thick head gaskets must be used.
 - (1) 260 27-822844-1 head gasket part number
 - (2) 300 27-840322-1 head gasket part number ➤ 2:00 or 1:87 gear ratio only.
 - All motors this group must use OEM 37cc minimum heads except 260.
 - All components must retain stock factory configuration from the adapter plate up except as noted.
 - 260 Mercury may use 26cc heads.
 - 280 Mercury may use 260 electronics
26. High Performance Mercury, 280 hp with standard 280 electronics:
- 1300 lbs minimum weight
 - Rev Limiter may be removed.
 - 2.00, 1.87, 1.75 gear ratio allowed.
 - Alternator belt to remain functional while in competition.
 - All components must remain in stock factory configuration from adapter plate up.
27. Pro Max or Lazer style EFI Mercury: factory production steel sleeve block only.
- 1350 lbs minimum weight
 - Rev Limiter may be removed.
 - OEM light weight flywheel allowed. No modifications.
 - High performance early style 16 amp alternator allowed.
 - OEM 1” thick reed manifold spacer plate is allowed.
 - 26cc minimum chamber OEM heads allowed.
 - Throttle body may be bored. No welding or other modifications to plenum.
 - Stock fuel injection configuration must be maintained, (injectors, fuel rail, regulator etc.)
 - Fuel injection ECU must remain in stock configuration inside and out.
 - All components must retain stock factory configuration from the adapter plate up except as noted.

OMC

28. OMC 3 Liter Looper:

- 1350 lbs minimum weight.
- After market light flywheel allowed.
- Early OEM small charging system may be used.
- Rev limiter may be removed.
- After market or cut OEM heads may be used, 36 cc minimum chamber volume. ➤ OEM looper carbs only, boring not allowed, any jetting.

Yamaha

29. Yamaha 2.6 liter:

- OEM looper carbs only, boring not allowed, any jetting.
- 1350 pounds minimum weight.
- After market light flywheel allowed.
- Rev limiter may be removed.
- Early OEM charging system and spark advance allowed.
- After market or cut OEM heads, 33cc minimum chambers.
- No long rod motors in this class.

- OEM carbs for like motor, boring is allowed.

30. **Pro Stock Motors (Stock Production Mercury 2.5 Laser/XRI EFI 200 motors) ➤**

Minimum Weight – 1325 pounds

- 1) Boats: Any production hull. No true tunnels or hydroplane type hulls.
- 2) Must use spec fuel and oil purchased at the race site only. NO fuel or oil additives allowed. 3) Engine must be a Stock Mercury Outboard Production 2.5 liter 200HP power head with laser injection and no changes, modifications, aftermarket parts, or parts from mercury high performance allowed other than expressly noted below.
- 4) Motor must be an original XRI or Carburetor Motor/Block.
- 5) No blocks with Special rod slots, Exhaust cavities that are different from a Normal Production Stock 200 fishing motors allowed.
- 5) No Pro Max, 240 Sport Jet, Motorola, High Performance, Special Production, Back door or Custom engine blocks allowed.
- 6) No 1991 model 14 pedal blocks allowed.
- 8) No blocks from Mercury with machined rod slots.
- 9) 10 pedal front halves only.
- 10) New motors with taller decked blocks with o-ring heads allowed.
- 11) BILLIT HEADS AND BILLIT TOP AND BOTTOM CAP ALLOWED.
- 12) Only 1 gasket per set of mating surfaces, Maximum thickness .065" **12) HP Mercury Parts Allowed (If it is not listed it is not allowed)**
 - a) Exhaust Divider Plate to mount coils.
 - b) One-piece HP adapter plate.
 - c) HP exhaust tuner.
 - d) HP rods bolts allowed. Rod caps may not be machined or ground for clearance.
 - e) HP metal cage rod bearings allowed.
 - f) **Aftermarket flywheels allowed.**
 - g) Stock High Performance 260 or drag Stator, Trigger, Switch Boxes, and Plug wires.
 - h) Mercury HP ECU allowed. (A-2, A-4, A-5, A-6, A-8, A-10, A-13, A-14, A-63, A-48)
 - i) Mercury HP ECU mounting Bracket.
 - j) Mercury HP Fuel Pump allowed.
 - k) Mercury HP Fuel Regulator allowed.
- 13) Mercury Laser Throttle body Fuel Injection with matching intake manifold only.
 - a) Fuel Injection plenum and intake manifold must retain stock exterior appearance and dimensions. No additional hoses fabrication or welding allowed.
 - b) Air inlets must remain stock size and appearance with original butterfly.
 - c) Must retain original fuel rail and injectors. The original fuel rail and injectors must be inside plenum.
 - d) Plenum cover must remain fixed in place.
 - e) All other internal modifications allowed.
- 14) After market composite reeds allowed. Only 4 or 5 pedal Mercury Production reed cages from like engine allowed. No mods to reed cages allowed. Reed cage lapping allowed.
- 15) No intake, reed, plenum, manifold and/or exhaust spacer plates allowed on any motors.
- 15) Any fuel pump and regulator allowed.
- 16) Oil injection and mechanical fuel pumps may be removed and blocked. Filling the remaining crankcase volume is not allowed.
- 18) ECU Box must be Mercury or Rapair replacement Production or High Performance, ECU reprogramming allowed. **Brucato PCU/ACU PPE may be used but adjustments from the cockpit ARE NOT ALLOWED. (e.g. No steamwheels or the like.)**
- 19) No OEM detonation modules or timing boxes. No device at all in the boat that can monitor or alter ignition timing or fuel curve, mechanical or electronic.
- 20) Ignition must be stock 16 amp Mercury High Performance or Rapair replacement. No changes or modifications to components or wiring allowed. Charging coils must remain on stator.
- 21) No extra wiring, hoses or non-approved devices under the cowl.
- 22) Pyrometers, Water temp or Engine temp senders, Water pressure or Fuel Pressure senders allowed.
- 23) Any spark plug allowed.

24) 24) 26cc minimum chamber OEM heads allowed. (ODBA only)

25) 0.042" minimum Piston to head clearance. Blocks may be decked to fit this spec with head gasket or o-ring heads. Any production or aftermarket head gasket or o-ring allowed.

25) Engines may use rubber water diverters in water jacket for improved durability.

26) Crankshaft must be a 2.5 Stock oil geared Crankshaft and 2.5 Rods.

28) No metal removal or any internal cylinder block mods allowed. No porting, polishing, feathering. No piston, rod, wrist pin, sealing ring or crankshaft modifications. No lightning, balancing or blue printing. Welding on cylinder block allowed for repair only and must be machined back to stock configuration and shape. **Piston Rings** may have end gap cut to racers preference. Metal may not be removed from inside or outside diameters of ring.

29) Up to .30 overbore allowed.

30) Aftermarket or OEM sleeves allowed with a max of 2 per motor. They must match the remaining sleeves in motor. No more than 2 original sleeves can be removed from block.

31) No swapping of sleeves from 1 motor to another motor. No moving sleeves around in a block. No Pro Max sleeves allowed.

32) Allowed Pistons: Additional Wrist pin washers are allowed in order to use bottom guided style pistons such as vertex

- 2.5 Bottom Guided pistons allowed Vertex and Pro Marine 2400, 2415, 2430 series Weisco 3124 series

- 2.5 Top Guided pistons allowed Vertex and Pro Marine 2500, 2515, 2530 series Weisco 3137 Series

33) All engines must use the original number of piston rings in the original location. No one ring pistons allowed.

34) Piston coating is allowed. No ceramic coated cylinder heads. Legal aftermarket pistons that are coated from the manufacturer are allowed. No other engine parts are allowed for coating.

35) Exhaust plates and tuners may be modified. NO aftermarket Tuners allowed.

36) Minimum mid section length ANY

midsection and clamp brackets may be shortened. Aftermarket housing may be used with modified OEM clamp bracket. Aftermarket housing may be used with Aftermarket clamp bracket. Liners may be removed and housings drilled for exhaust relief. .

37) No small gear cases. Gear cases must have functional forward, neutral and reverse and be shift- able from the driver's seat. Aftermarket nosecones with low water pickups allowed. 38) Only 1:87 or 2:1 gears. No other ratios allowed.

38) Any style engine cowls allowed. Must maintain stock appearance.

1430 Modified

1. Any boat allowed
2. Any modifications allowed
3. Any midsection only
4. Big gearcase only
5. Spec fuel and oil only.
6. No additives allowed
7. No V8 motor
8. BVI FRONT HALVES ALLOWED

Minimum Weights 1430 Modified

1. 153ci to 156ci 1430 pds
2. 157ci to 186ci 1505 pds
3. 187 ci and up 1555 pds
4. Above listed weight packages with carbs may reduce by 130 pds

Pro Stock

Race Hulls utilizing Stock Production Mercury 2.5 Laser/XRI EFI/Carburators, Yamaha and OMC Motors

- 1) Boats: Any production hull. No true tunnels or hydroplane type hulls.
- 2) Fuel: Sunoco 112 octane race gas. Must use spec fuel and oil purchased at the race site only. NO fuel or oil additives allowed.
- 3) Engine must be a Stock Mercury Outboard Production 2.5 liter 200HP power head with laser injection and no changes, modifications, aftermarket parts, or parts from mercury high performance allowed other than expressly noted below.
- 4) Motor must be an original XRI or Carburetor Motor/Block.
- 5) No blocks with Special rod slots, Exhaust cavities that are different from a Normal Production Stock 200 fishing motors allowed.
- 6) No Pro Max, 240 Sport Jet, Motorola, High Performance, Special Production, Back door or Custom engine blocks allowed.
- 7) No 1991 model 14 pedal blocks allowed.
- 8) No blocks from Mercury with machined rod slots.
- 9) 10 pedal front halves only.
- 10) New motors with taller decked blocks with o-ring heads allowed.
- 11) Only 1 gasket per set of mating surfaces, Maximum thickness .065"
- 12) **HP Mercury Parts Allowed (If it is not listed it is not allowed)**
 - a) Exhaust Divider Plate to mount coils.
 - b) One-piece HP adapter plate.
 - c) HP exhaust tuner.
 - d) HP rods bolts allowed. Rod caps may not be machined or ground for clearance.
 - e) HP metal cage rod bearings allowed.
 - f) Aftermarket Flywheels allowed.
 - g) Stock High Performance 260 or drag Stator, Trigger, Switch Boxes, and Plug wires.
 - h) Mercury HP ECU allowed. (A-2, A-4, A-5, A-6, A-8, A-10, A-13, A-14, A-63, A-48)
 - i) Mercury HP ECU mounting Bracket.
 - j) Mercury HP Fuel Pump allowed.
 - k) Mercury HP Fuel Regulator allowed.
 - l) Any oem mercury rods allowed except chatfields.

- 13) Mercury Laser Throttle body Fuel Injection with matching intake manifold and OEM carburetors and intakes only from like manufacturer. No carburetor modifications unless specifically noted. No Mercury OEM Hi-Performance Carburetors.
 - a) Fuel Injection plenum and intake manifold must retain stock exterior appearance and dimensions. No additional hoses fabrication or welding allowed.
 - b) Sloss baffles allowed in OEM OMC plastic carbs.
 - c) Air inlets must remain stock size and appearance with original butterfly.
 - d) Must retain original fuel rail and injectors. The original fuel rail and injectors must be inside plenum.
 - e) Plenum cover must remain fixed in place.
 - f) All other internal modifications allowed.
- 14) After market composite reeds allowed. Only 4 or 5 pedal Mercury Production reed cages from like engine allowed. No mods to reed cages allowed. Reed cage lapping allowed.
- 15) No intake, reed, plenum, manifold and/or exhaust spacer plates allowed on any motors.
- 16) Any fuel pump and regulator allowed.
- 17) Oil injection and mechanical fuel pumps may be removed and blocked. Filling the remaining crankcase volume is not allowed.
- 18) ECU Box must be Mercury, Brucato ACU or Rapair (CDI) replacement and must be mounted on the engine. ECU re-programming allowed.
- 19) PCU is not allowed.
- 20) No Steam Wheels allowed or adjustments to fuel once boat enters the water.
- 21) No mods to upper bearing cap or trigger assy. No material removal from either part allowed.
- 22) No OEM detonation modules or timing boxes. No device at all in the boat that can monitor or alter ignition timing or fuel curve, mechanical or electronic.
- 23) Ignition must be stock 16 amp Mercury High Performance, Rapair replacement and Yamaha ignition. No changes or modifications to components or wiring allowed. Charging coils must remain on stator.
- 24) No extra wiring, hoses or non-approved devices under the cowl.
- 25) Pyrometers, Water temp or Engine temp senders, Water pressure or Fuel Pressure senders allowed.
- 26) Any spark plug allowed.
- 27) Any Mercury Production Bath Tub or Top Hat Style Cylinder Head: 32 cc minimum head volume. Cylinder Heads may be cut to a 32 cc min. Heads with Hemi style chambers are not allowed. Squish area must remain flat, beveled squish area is not allowed. Chambers must retain stock configuration, shape and diameter. Welding allowed only for repairs and must be machined back to stock configuration and shape. Light sanding and polishing allowed cleaning up head chambers. No Angle cut heads.
- 28) 0.042" minimum Piston to head clearance. Blocks may be decked to fit this spec with head gasket or o-ring heads. Any production or aftermarket head gasket or o-ring allowed.
- 29) Engines may use rubber water diverters in water jacket for improved durability.
- 30) Crankshaft must be a 2.5 Stock oil geared Crankshaft and 2.5 Rods.
- 31) No metal removal or any internal cylinder block mods allowed. No porting, polishing, feathering. No piston, rod, wrist pin, sealing ring or crankshaft modifications. No lightning, balancing or blue printing. Welding on cylinder block allowed for repair only and must be machined back to stock configuration and shape. Piston Rings may have end gap cut to racers preference. Metal may not be removed from inside or outside diameters of ring.
- 32) Up to .30 overbore allowed.
- 33) Aftermarket or OEM sleeves allowed with a max of 6 per motor. They must match motor.
- 34) No swapping of sleeves from 1 motor to another motor. No moving sleeves around in a block. No Pro Max sleeves allowed.
- 35) Cosmetic billet acc parts allowed at motor tech discretion. Billet Heads and Billet top and bottom caps are allowed.
- 36) Allowed Pistons: Additional Wrist pin washers are allowed in order to use bottom guided style pistons such as vertex
 - 2.5 Bottom Guided pistons allowed Vertex and Pro Marine 2400, 2415, 2430 series Weisco 3124 series
 - 2.5 Top Guided pistons allowed Vertex and Pro Marine 2500, 2515, 2530 series Weisco 3137 Series
 - 2.5 WSM Top Guided pistons Part #100-21-065K

- 2.5 Top Guided pistons allowed Vertex and Pro Marine 2500, 2515, 2530 series Weisco 3137 Series,
 - 2.5 Bottom Guided pistons allowed Vertex and Pro Marine 2400, 2415, 2430 series Weisco 3124 series,
 - 2.4 Bottom Guided pistons allowed, Vertex and Pro Marine 2100, 2115, 2130 series Weisco 3100 series.
 - 2.0 Bottom Guided pistons allowed, Vertex and Pro Marine 8000, 8015, and 8030 Series Weisco 3108 series,
 - 2.0 Top Guided pistons allowed, Vertex and Pro Marine 4000, 4015, and 4030 series Weisco 3140 series,
 - OMC 3.0 liter standard pistons allowed Vertex and Pro Marine 1900, 1920, 1930, 4300, 4320, 4330 series Weisco 3119 Series
 - OMC 3.0 liter Ficht pistons allowed Vertex and Pro Marine 6000, 6020, 6030 series Weisco 3178 Series.
 - Yamaha Pistons allowed Vertex and Pro Marine 1600, 1620, 1640, 4500, 4520, 4540, 4600, 4020, and 4040 series Weisco 3116, 3146 and 3200 series,
- 37) All engines must use the original number of piston rings in the original location. No one ring pistons allowed.
 - 38) Piston coating is allowed. No ceramic coated cylinder heads. Legal aftermarket pistons that are coated from the manufacturer are allowed. No other engine parts are allowed for coating.
 - 39) Exhaust plates and tuners may be modified. Aftermarket Tuners allowed.
 - 40) Any mid bracket assembly allowed, Any midsection allowed.
 - 41) No small gear cases. Gear cases must have functional forward, neutral and reverse and be shift-able from the driver's seat. Aftermarket nosecones with low water pickups allowed.
 - 42) Any Gear Ratio Allowed ratios allowed. Must be OEM
 - 43) Any style engine cowls allowed. Must maintain stock appearance.
 - 44) Cosmetic billet acc. Allowed at motor tech discretion. Billet heads and Billet top and bottom cap allowed.
 - 45) Light Weight flywheel must retain OEM magnets/Brendon Powers flywheel allowed with no modifications
 - 1) Mercury Heads: No Metal removal except as noted.
 - 142 cubic in. 2.4 liter casting #15221, 32 cc min.
 - 153 cubic in. 2.5 liter casting #18488, 32 cc min.
 - 122 cubic in. 2.0 liter, 23 cc min.
 - 2.5 heads may be cut to 32 cc min.
 - O-Ring head to be 32 cc minimum.
 - No heads cut with beveled squish. (Mercury Only)
 - 14 Pedal non-finger port 2.4 use stock heads with no metal removal.
 - 2) 3.0 OMC Min Head Volume is 43 cc. Head may be cut to this volume. Motor is* built with dome piston and beveled squish.
 - 3) 2.6 Yamaha Min Head Volume is 49 cc. Head may be cut to this volume. Motor* is built with dome piston and beveled squish.

Specific Motor Rules and Minimum Weights

Mercury Outboards

- 2.5 Liter 1400 lbs
- 2.4 Liter 142.2 cubic inches 1250 lbs.
- 2.0 Liter 1025 lbs. □ 3.0 Liter 1450 lbs.

Yamaha Outboards

- 2.6 Liter (Standard rod motors ONLY) 1325 lbs.
- 2.6 Liter (Standard rod motors ONLY) Without stock squish-1360 lbs.
- 3.0 Liter 1450 lbs.
- 3.0 Liter 1485 lbs. - Without stock squish

OMC Outboards

- 3.0 Liter with Standard block 1400 lbs.
- 3.0 Liter with Ficht block 1430lbs.

PRO CARB

1. Boats: Any production hull
2. Fuel: Must purchase and use fuel and oil sold at race site only. No additives allowed.
3. No nitrous oxide or any other type bottle pressure injection used to enhance engine performance. No nitrous bottles in boat, nitrous solenoids must be disconnected.
4. Engine modifications are allowed.
5. Gear cases must have at least forward
6. After market Dual plug cylinder heads allowed all motors.
7. 7No lightened crankshafts. Weight (metal) may be added to balance, but not removed. Stock stroke required.
8. 8Modified OEM or aftermarket tuners allowed.
9. Aftermarket ignition allowed on all motors.
10. Pistons must be OEM or after market made to OEM specs.
11. Up to .030" overbore with no weight penalty on steel bore motors only. Overbore of .060" max all motors with a weight penalty of five (5) pounds per cubic inch calculated from standard bore. Nicasil sleeve motors with overbore must carry five pound weight penalty per cubic inch calculated from standard bore.
12. No V8 engines.
13. "Behind the liner" inlet porting allowed all motors.
14. Aftermarket lightweight engine cowls allowed.
15. Aftermarket composite reed allowed all motors, reed cages for like manufacturer.
16. Electric fuel pump and adjustable fuel pressure regulator allowed.
17. Pyrometers are allowed.
18. Air boxes may be removed and aftermarket velocity stacks are allowed.
19. Aftermarket lightweight flywheels are allowed.
20. Any outboard marine carburetor allowed. Must remain in stock configuration.
21. See Fuel/Technical for aftermarket and other parts not allowed.
22. BVI front halves allowed.

SPECIFIC MOTOR RULES AND MINIMUM WEIGHTS

Mercury V6:

- | | |
|---|----------------------------|
| A. 153 cubic inches | 1375 pounds minimum weight |
| B. 142.2 cubic inch "behind the liner": | 1250 pounds minimum weight |
| C. 142.2 cubic inches | 1175 pounds minimum weight |
| D. 122 cubic inch "behind the liner" | 1125 pounds minimum weight |
| E. 122 cubic inch motors | 1050 pounds minimum weight |
| | |
| F. OMC Loop Charged V6 | 1400 pounds minimum weight |
| G. OMC 3.3 liter carbureted | 1450 pounds minimum weight |
| H. OMC 2.7 liter (165 cubic in) | 1375 pounds minimum weight |
| | |
| I. Yamaha 2.6 liter motors: | 1375 pounds minimum weight |

V6 Pro

1. Any type hull allowed
2. 4 ¾ cases only no XR6, must be shiftable
3. XRI/Laser injection and carb only
4. Fishing motors only no high performance motors
5. Steel sleeves only, No Billet cranks
6. BVI front halves allowed
7. All compression checks with craftsman or speedway motors guage and long adapter
8. 153 cubic in. – 157 cubic in.
9. Slide front halves not limited to svs any other form of front air entry ok, must retain stock mercury laser injection plenum.
7 petal front with SVS 165lb compression 1325lb
7petal front no SVS 165lb compression 1300lb
Carbs unlimited compression 1250lb

5 petal front half with SVS 165lb compression 1300lb
5 petal with no SVS 165lb compression 1275lb
5 petal front half with carbs unlimited compression 1225lb

OMC 3.0 liter carbs only
Unlimited compression 1375lb
165lb compression 1325lb

2.0 and 2.4 liter engines allowed unlimited compression and chrome bores

The weights will be -50lbs on whatever combination you decide to run from the above weights.

River Racer

1. Any modifications allowed, compression limited to 150 lbs. all motors.
2. Tech will be checked with a craftsman gauge or speedway with long adapter.
3. Any production hull (No tunnel or Hydro)
4. Any mid-section all motors BVI front halves allowed.
5. Spec Fuel and oil only. No additives allowed
6. 153ci – 156ci 1400 lbs.
7. 157ci – 186ci 1475 lbs.
8. a.186ci and up 1525 lbs b.All V8 Motors – 1700 lbs

Pro Mod

1. Any boat allowed.
2. Any modifications allowed.
3. Any mid-section allowed. BVI front halves allowed
4. Spec Fuel and oil only. No additives allowed
5. Minimum weights as follows:

- 153ci – 156ci 1225lbs
- 157ci – 170ci 1325lbs
- No billet blocks allowed

BIG BLOCK PRO MOD

1. Any boat allowed.
2. Any motor allowed.
3. Any mid-section allowed.
4. Must run spec fuel and spec oil.
 - Small Block 1200 lbs
 - Big Block 1350 lbs
 - V8 1550

Pro Drag (Unlimited)

1. Any boat allowed.
2. Any motor allowed. Billet motor allowed.
Any modification allowed.
3. Any mid-section allowed.
4. Any fuel. Additives allowed.
5. Nitrous boats minimum weight 1100 lbs

Definitions

1. After Market: A part or component manufactured for an outboard engine other than by a major OEM (i.e., Mercury, OMC, Yamaha or Suzuki).
2. Crew Member: Anyone in the pit area accompanying an owner/driver or anyone present with the owner/driver's consent. The decision establishing the Crew Member of a given owner/driver or team may be made by any race official.
3. ECU: Electronic Control Unit, aka Brain, aka Brain Box.
4. EGT: Exhaust Gas Temperature
5. E-PROM: Erasable Programmable Read Only Memory
6. Hydro: A boat with hydrofoils or a flat bottom designed to lift above water at high speeds.

7. Outlaw Class: River Racer, Pro Carb, V6 pro, Pro Mod, Big Block Pro Mod, Pro Drag, Unlimited.
8. Laser Injection: Mercury Marine's standard production style fuel injection system as used on XRI and PRO-MAX series outboard engines.
9. OEM: Original Equipment Manufacturer
10. Quorum: Fifty percent (50%) is the minimum number of members required to be present at an assembly before it can validly proceed to transact business.
11. Note: President and Vice President may be included to constitute a quorum.
12. Race Entry: Every boat registered for an event.
13. Race Official: President, Vice President, Rules Committee member or anyone appointed by the President to perform any official duty relating to any event.
14. TPI: Throttle Position Indicator
15. True Tunnel: A production boat designed for Formula 1 or Champ Boat classes. Center pod is 7/8" or more shallow than the outer sponsons. It is designed to run on the sponsons only.

2023 ODBA Race Site Requirements

The following items are the minimum requirements necessary to host, sponsor and/or stage an ODBA event.

Items provided by ODBA:

1. Event insurance coverage. Copies of event policy available at sponsor's request. Organizations and individuals may be added to our policy for a small fee.
2. Personnel to manage race agenda, judge's stand, start line, launch ramps, and pit areas. Radios for ODBA race management communications.
3. Professional water rescue crew with divers and related equipment. Assistance may be required/requested with event sponsor.
4. Buoys, starting lights and related race course equipment.
5. Scales, slings, and related equipment to be used in conjunction with the SPONSOR provided crane for weighing boats. *** see Sponsor Provided Items
6. Awards plaques for 1st, 2nd, and 3rd places for each class.
7. Event coverage on ODBA website and internet racing forums. Note: Television coverage available at additional cost.

ODBA reserves the right to display series sponsor banners and signage and sell ODBA merchandise at all events. **ODBA also reserves the right to be the sole event T-shirt provider unless expressly negotiated with this contract.**

Event Sponsor Provided Items:

1. Sponsor must obtain ALL necessary Permits and Licenses to hold an event of this nature as required by Federal, State and local laws.
2. Sponsor required minimum financial commitment is \$_____ due to ODBA Saturday morning prior to the drivers meeting at 10:00 A.M., in the form of a cashier's check. See #20 Prize Monies.
3. (2) Dedicated paramedics and ambulance service assigned to race site must be provided and be on site by 11:00 A.M. on Friday Testing, Saturday Race Day and Sunday Race Day until sanctioned racing and testing is completed.
4. A crane or boom/winch truck with a minimum 2500 pound lifting capacity and a ten foot reach is required. It must be on site and ready for operation by 8:00 A.M. on both days. (ODBA will provide scales and lift harness). If a crane operator is NOT provided, keys for our operation must be provided.
5. We require a powered pontoon boat or barge that is a minimum of 20 feet. This vessel is used as a personal platform to operate our starting light equipment. It must be ready for operation by 7:30

- A.M. both days. (Anchors and anchor lines provided by ODBA)
6. This vessel and all other vessels provided for official ODBA use must be in compliance with all state and local laws.
 7. ODBA will require two manned support boats for official use. They may be used for towing and recovery of stranded race boats, taxing personnel to and from the starting barge and/or as safety patrol to assist in regulating traffic control on navigatable waters. An 18-20 foot runabout with adequate towing power and PWC (jet ski) makes for a good combination of support boats. Both should be equipped with tow ropes with hooks, fire extinguishers, etc.
 8. Race site must have adequate room to hold events. This includes pit area for up to 100 boats, tow vehicles, support equipment/vehicles, and concession/vendor displays.
 9. Race site (waterway) must have adequate "Pre stage", "Track", and "Shut down" room. This will require an area approximately 2000 to 2500 feet in total length. A professionally surveyed 800' course with plot map and pin/flag locations will be required. Location and placement of the surveyed race course must take into consideration the above mentioned "pre-stage area", "track =800' course", and the "shut down" areas. The track or the surveyed 800' course is defined by the starting line and the finish line and these should be 800 feet apart. A diagram will be provided; in addition to using the assistance of your local ODBA racing representative. This local representative DOES NOT have the authority to CHANGE any requirements.
 10. Race course and waterway must have restricted access during the event.
 11. Any courses on public or open waterways must have Coast Guard and/or DNR approval and permits. Enforcement officers and related equipment and personnel are also required.
 12. Location of the Finish Line and Judges stand is very important. A clear, unobstructed line of sight from the Judges Stand to the Starting line is imperative.
 13. We require a reliable source of electrical power at our Finish Line/Judges Stand, four 110-volt outlets minimum.
 14. A public address system is required to announce race heats and sponsor information. This is CRITICAL: The public address system must have adequate power, speakers, and be positioned to cover the entire race site and pit area. The system must be ready for operation by 8:00 A.M. both mornings. A technician to monitor the system operation and correct problems is suggested. Race announcer will be located at Judges Stand.
 15. Adequate and clean restrooms for the expected size crowd, whether permanent, or portable, must be provided and serviced as necessary.
 16. Peace/Security officers from the local police and Sheriff's Department are necessary and should be stationed at appropriate intervals around the event to ensure crowd control.
 17. Local celebrities to perform the National Anthem on both days are suggested.
 18. A local pastor to perform the invocation each day is also suggested.
 19. Local media coverage, before, during, and after the event is suggested and is very beneficial to the success of current and future events
 20. Prizes Monies: It has been our experience in the past that the larger the purse the larger the attendance by the drag racing community. Realize that drag boat racing is an expensive hobby and some racers are able to only race a limited schedule. Therefore the larger the advertised purse the greater the anticipated boat count and the bigger the race.

I agree to and accept these terms.

_____ Date _____
 President ODBA

_____ Date _____
 Authorized Race Site Coordinator